

# North Queensland Bulk Ports Corporation

## McEwens Beach, Mky Northern and Southern Stations

Ambient Air Quality Monitoring

Validated Report

1<sup>st</sup> January – 31<sup>st</sup> January 2026

Report No: DAT23815

Report issue date: 27<sup>th</sup> February 2026

Maintenance contract: MC950

*Acoem Australasia (Ecotech Pty Ltd) ABN: 32005752081*

*19-21 Brenock Park Drive, Ferntree Gully VIC. 3156. AUSTRALIA*

*Tel No: +61397307800 Fax No: 1300 668 763*

*Email [info.au@acoem.com](mailto:info.au@acoem.com) WEB [acoem.com.au](http://acoem.com.au)*

This document shall not be reproduced except for in full, without the written approval of Acoem Australasia (Ecotech Pty Ltd)

**North Queensland Bulk Ports - McEwens Beach,  
Mky Northern and Southern Stations  
Report No: DAT23815**



North Queensland Bulk Ports Corporation

Customer Details	
<b>Customer</b>	North Queensland Bulk Ports Corporation
<b>Contact name</b>	Jackson Parker
<b>Address</b>	Level 1, Waterfront Place, Mulherin Drive, Mackay Harbour QLD 4740
<b>Email</b>	jparker@nqbp.com.au
<b>Phone</b>	+617 4969 0742

Revision History			
Revision	Report ID	Date	Analyst
0	DAT23815	27/02/2026	Evelyn Wang

**Report by:** Evelyn Wang

**Approved Signatory:** Xinyu Ke

## Table of Contents

Customer Details.....	2
Revision History .....	2
Table of Contents.....	3
List of Figures .....	4
List of Tables .....	5
Executive Summary.....	6
1.0 Introduction .....	7
2.0 Monitoring and Data Collection.....	7
2.1 Siting Details.....	7
2.2 Monitored Parameters .....	10
2.3 Data Collection Methods .....	10
2.3.1 Conformance with Standards.....	11
2.3.2 Data Acquisition .....	11
2.4 Data Validation and Reporting.....	12
2.4.1 Validation .....	12
2.4.2 Reporting.....	12
3.0 Target Maximum Exceedance.....	14
4.0 Calibrations and Maintenance.....	15
4.1 Units and Uncertainties .....	15
4.2 Maintenance .....	16
4.2.1 Maintenance Notes.....	16
4.2.1.1 McEwens Beach station .....	16
4.2.1.2 Mky Northern station .....	16

4.2.1.3 Mky Southern station .....	16
4.2.2 Calibration & Maintenance Summary Tables .....	16
5.0 Results.....	18
5.1 Data Capture .....	18
5.2 Air Quality Summary .....	19
5.2.1 Air Quality Categories .....	20
5.3 Tabulated Data.....	23
5.4 Graphic Representations .....	24
6.0 Valid Data Exception Tables.....	28
7.0 Report Summary .....	29
Appendix 1 - Definitions & Abbreviations.....	30
Appendix 2 - Explanation of Exception Table .....	31

## List of Figures

Figure 1: McEwens Beach Monitoring Station Location .....	8
Figure 2: Mky Northern and Southern Monitoring Stations Location .....	9
Figure 3: Hourly PM <sub>10</sub> Averages for NQBP Mky Northern Station Assessed Against the Air Quality Categories .....	21
Figure 4: Hourly PM <sub>10</sub> Averages for NQBP Mky Southern Station Assessed Against the Air Quality Categories .....	22
Figure 5: McEwens Beach Station PM <sub>10</sub> 24-hour Averages .....	24
Figure 6: Mky Northern Station PM <sub>10</sub> 24-hour Averages.....	25
Figure 7: Mky Southern Station PM <sub>10</sub> 24-hour Averages.....	26
Figure 8: Mky Northern and Mky Southern Stations PM <sub>10</sub> 24-hour Averages Comparison .....	27

## List of Tables

Table 1: NQBP Monitoring Site Locations.....	7
Table 2: Parameters Measured at NQBP Monitoring Stations .....	10
Table 3: Methods .....	10
Table 4: Target Maximum Exceedance at McEwens Beach Station .....	14
Table 5: Units and Uncertainties.....	15
Table 6: McEwens Beach Maintenance Table .....	16
Table 7: Mky Northern Maintenance Table.....	17
Table 8: Mky Southern Maintenance Table.....	17
Table 9: Monthly Data Capture for NQBP stations.....	18
Table 10: General Statistics.....	19
Table 11: Exceedance Recorded for McEwens Beach Station .....	19
Table 12: Colour-coded Categories for Air Quality Categories.....	20
Table 13: NQBP Stations Data Table .....	23
Table 14: McEwens Beach BAM 1020 Valid Data Exception Table.....	28
Table 15: Mky Northern E-Sampler Valid Data Exception Table .....	28
Table 16: Mky Southern E-Sampler Valid Data Exception Table .....	28

## Executive Summary

North Queensland Bulk Ports Corporation has commissioned Acoem Australasia to conduct air quality monitoring, including McEwens Beach, and port of Mackay (Mky) Dust Monitoring Program at the Northern and Southern stations.

The McEwens Beach monitoring station, commissioned in March 2013, is currently comprised of a Solar BAM 1020 measuring PM<sub>10</sub> particulates. The Mky Northern and Southern stations, commissioned in July 2016, are equipped with E-Samplers. Both E-samplers were equipped to measure TSP until 12<sup>th</sup> June 2020 when the E-Sampler heads at both stations were changed to measuring PM<sub>10</sub>.

This report presents the data collected from the McEwens Beach, Mky Northern and Southern stations for January 2026.

The PM<sub>10</sub> monthly data capture rate of PM<sub>10</sub> at McEwens Beach was 100.0%.

The PM<sub>10</sub> monthly data capture rate of PM<sub>10</sub> at Mky Northern was 100.0%.

The PM<sub>10</sub> monthly data capture rate of PM<sub>10</sub> at Mky Southern was 100.0%.

The PM<sub>10</sub> monthly average for McEwens was 14 µg/m<sup>3</sup> with a standard deviation of 9 µg/m<sup>3</sup>.

The PM<sub>10</sub> monthly average for Mky Northern station was 17 µg/m<sup>3</sup> with a standard deviation of 12 µg/m<sup>3</sup>.

The PM<sub>10</sub> monthly average for Mky Southern station was 16 µg/m<sup>3</sup> with a standard deviation of 12 µg/m<sup>3</sup>.

## 1.0 Introduction

Acoem Australasia was commissioned by North Queensland Bulk Ports Corporation to provide monitoring and data reporting for McEwens Beach ambient air quality monitoring station and Mackay Dust Monitoring Program at Northern and Southern stations, located as detailed in Table 1. Acoem Australasia commenced data collection from the McEwens Beach station on the 4<sup>th</sup> (Solar E-Sampler PM<sub>2.5</sub>) and 5<sup>th</sup> (Solar BAM PM<sub>10</sub>) April 2013. The PM<sub>2.5</sub> E-Sampler was decommissioned on the 3<sup>rd</sup> September 2020. Data collection from both Mky Northern and Southern stations was commenced on 20<sup>th</sup> July 2016.

The data presented in this report:

- Describes air quality measurements;
- Compares monitoring results;
- Has been quality assured;
- Conforms to NATA accreditation requirements, where applicable.

## 2.0 Monitoring and Data Collection

### 2.1 Siting Details

The NQBP air quality monitoring network consists of 3 ambient air quality monitoring stations. The stations' location and siting details are described below.

**Table 1: NQBP Monitoring Site Locations**


Site Name	Geographical Coordinates	Height Above Sea Level (m)
McEwens Beach	21° 14' 58.23" S, 149° 12' 23.84" E	6m
Mky Northern	21° 06' 5.37" S 149° 13' 28.89" E	5m
Mky Southern	21° 06' 24.7" S 149° 13' 28.20" E	5m

# North Queensland Bulk Ports - McEwens Beach, Mky Northern and Southern Stations Report No: DAT23815



North Queensland Bulk Ports Corporation

Siting audits were conducted at McEwens, Mky Northern and Mky Southern on 25<sup>th</sup> February 2025, 2<sup>nd</sup> October 2025 and 2<sup>nd</sup> October 2025, respectively. This is to assess station siting against the guidelines and mandatory requirements of AS/NZS 3580.1.1:2016 “Methods for sampling and analysis of ambient air – guide to siting air monitoring equipment”. The siting of these stations does not conform with the guidelines in AS/NZS 3580.1.1:2016. Details are included in Section 2.3.1.

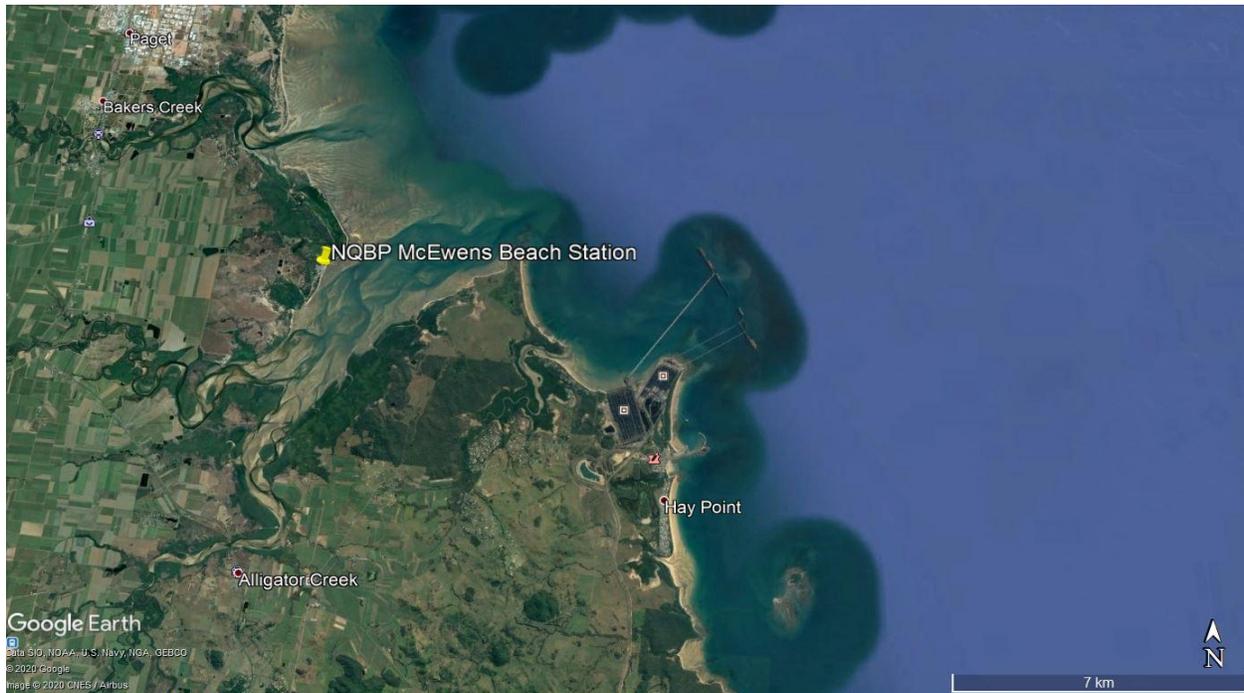

**Figure 1: McEwens Beach Monitoring Station Location**

**North Queensland Bulk Ports - McEwens Beach,  
Mky Northern and Southern Stations  
Report No: DAT23815**



North Queensland Bulk Ports Corporation



**Figure 2: Mky Northern and Southern Monitoring Stations Location**

## 2.2 Monitored Parameters

Table 2 below details the parameters monitored and the instruments used at the McEwens Beach, Mky Southern and Mky Northern stations. Appendix 1 defines any abbreviated parameter names used throughout the report.

**Table 2: Parameters Measured at NQBP Monitoring Stations**

Site Name	Parameter Measured	Instrument and Measurement Technique
McEwens Beach	PM <sub>10</sub>	Met One BAM 1020 – Beta ray attenuation
Mky Northern	PM <sub>10</sub>	Met One E-Sampler – light scatter aerosol monitor
Mky Southern	PM <sub>10</sub>	Met One E-Sampler – light scatter aerosol monitor

## 2.3 Data Collection Methods

Table 3 shows the methods used for data collection.

**Table 3: Methods**

Parameter Measured	Data Collection Methods Used	Description of Method
PM <sub>10</sub> (BAM 1020)	AS/NZS 3580.9.11:2022	Methods of sampling and analysis of ambient air. Method 9.11: Determination of suspended particulate matter - PM <sub>10</sub> beta attenuation monitors
PM <sub>10</sub> (E-Sampler)	Met One E-Sampler Operation Manual	Met One E-Sampler Operation Manual

### 2.3.1 Conformance with Standards

Unless stated below, parameters are monitored at NQBP stations according to the methods detailed in Table 3 above.

- The Met One E-Sampler particulate monitor used at Mky Northern and Southern is classified as a non-compliant instrument under the relevant Australian Standards (e.g. AS/NZS 3580 series) for regulatory particle monitoring.
- The siting of McEwens Beach station does not conform with all the recommendations of the guidelines AS/NZS 3580.1.1:2016 due to trees and/or buildings in the area that may restrict the airflow in the vicinity of the sample inlet or alter the pollutant concentrations via adsorption or absorption.
- The siting of Mky Northern station does not conform with the guidelines in AS/NZS 3580.1.1:2016 due to it being located 2 meters away from a fence and road located less than 5m south of E-Sampler.
- The siting of Mky Southern station does not conform with the guidelines in AS/NZS 3580.1.1:2016 due to Port Road being located 6 meters west of the monitor, although traffic volume is very low as the site is within a secure port facility.

### 2.3.2 Data Acquisition

At McEwens Beach station, data acquisition is conducted using a Met One BAM 1020 instrument. At Mackay Northern and Southern stations, E-Samplers are used for data acquisition. Each instrument is equipped with a 4G modem to enable remote data collection. The recorded data are collected daily via Airodis™ version 5.2.4 and stored at Acoem Australasia's Environmental Reporting Services (ERS) department in Melbourne, Australia.

- **BAM 1020:** Data are logged in hourly intervals.
- **E-Samplers:** Data are logged in 5-minute intervals.

Unless otherwise specified, raw data are retained for a minimum of four years.

## **2.4 Data Validation and Reporting**

### **2.4.1 Validation**

The Acoem Australasia ERS department performs daily data checks to ensure maximum data capture rates are maintained. Any equipment failures are communicated to the responsible field engineers for urgent rectification. Acoem Australasia ERS maintains two distinct databases containing non-validated and validated data respectively.

The validated database is created by duplicating the non-validated database and then flagging data affected by instrument faults, calibrations, and other maintenance activities. The data validation software requires the analyst to supply a valid reason (e.g., backed by maintenance notes, calibration sheets, etc) in the database for flagging any data as invalid.

All data validation activities are undertaken in accordance with AS 3580.19:2020 – Method 19: Ambient air quality data validation and reporting, which specifies the procedures for checking, validating, documenting and reporting ambient air quality monitoring data to ensure it is technically defensible and suitable for regulatory and scientific use.

Validation is performed by the Acoem Australasia ERS operator, and the validation is reviewed. All data is checked and graphs and reports are generated based on the hourly data for BAM 1020 and the verified five-minute data for E-Samplers.

### **2.4.2 Reporting**

Data are reported in accordance with the requirements of *AS 3580.19:2020*, ensuring consistency, transparency and auditability of validated ambient air quality data. Details of the data contained in each Excel file are provided below.

The reported data is in a Microsoft Excel format file named *“NQBP Monthly Data Report January 2026.xlsx.”*

The Excel file consists of six worksheets:

1. Cover
2. 5 Minute Data Averages
3. 15 Minute Data Averages
4. 1 Hour Data Averages
5. 24 Hour Data Averages
6. Valid Data Exception Tables

The data contained in these reports is based on Australian Eastern Standard Time. Data is for all parameters measured continuously.

---

**North Queensland Bulk Ports - McEwens Beach,  
Mky Northern and Southern Stations  
Report No: DAT23815**



**North Queensland Bulk Ports Corporation**

---

For BAM 1020, all averages are calculated from hourly data, while for E-Samplers, all averages are calculated from the five-minute data. Averages are based on a minimum of 75% valid readings within the averaging period.

Averaging periods of eight hours or less are reported for the end of the period, i.e., the hourly average 02:00am is for the data collected from 1:00am to 2:00am. One-hour averages are calculated based on a clock hour. One day and one-year averages are calculated based on calendar days.

### 3.0 Target Maximum Exceedance

The air quality goals for pollutants monitored at McEwens Beach Station monitoring network site are based on the Australian National Environmental Council (NEPC) Ambient Air Quality NEPM. The target maximum exceedance is shown in Table 4 below.

**Table 4: Target Maximum Exceedance at McEwens Beach Station**

Parameter	Time Period	Exceedance Level	Units	Maximum Allowable Exceedance*
PM <sub>10</sub>	1 day	50	µg/m <sup>3</sup>	None
PM <sub>10</sub>	1 year	25	µg/m <sup>3</sup>	None

\*Maximum allowable exceedance is a target. The site is not under operational control or formal compliance limits.

Note:

Exceptional events are excluded from this standard. As per the Ambient Air Quality NEPM, **Exceptional event** means a fire or dust occurrence that adversely affects air quality at a particular location, and causes an exceedance of 1-day average standards in excess of normal historical fluctuations and background levels, and is directly related to: bushfire; jurisdiction authorised hazard reduction burning; or continental scale windblown dust.

Acoem Australasia will include any valid data identified as being associated with an exceptional event in all report tables and graphic representations. However, 1-day averages associated with exceptional events will not be counted as exceedance of the Air Quality standard.

The measurement uncertainty (as outlined in Table 5) is not considered when assessing exceedance of the air quality goals. Exceedance are only reported for above goal values based on the decimal places reported.

## 4.0 Calibrations and Maintenance

### 4.1 Units and Uncertainties

The uncertainties for each parameter have been determined by the manufacturer’s tolerance limits of the equipment’s parameters, and by the data collection standard method.<sup>2</sup>

The reported uncertainties are expanded uncertainties, calculated using coverage factors which give a level of confidence of approximately 95%.

**Table 5: Units and Uncertainties**

Parameter	Units	Resolution	Uncertainty <sup>1</sup>	Measurement Range
PM <sub>10</sub> (BAM 1020)	µg/m <sup>3</sup>	1 µg/m <sup>3</sup>	24Hr: ± (5.5 % of reading + 4.0 µg/m <sup>3</sup> ) (in range 0 - 100 µg/m <sup>3</sup> ) Hr: ± (8 % of reading + 8.0 µg/m <sup>3</sup> ) k factor of 2.0	0 to 1000 µg/m <sup>3</sup> LDL <sub>24hr</sub> = 1.0µg/m <sup>3</sup> LDL <sub>hr</sub> = 4.8µg/m <sup>3</sup>
PM <sub>10</sub> (E-Sampler)	µg/m <sup>3</sup>	1 µg/m <sup>3</sup>	± 10% to gravimetric method <sup>2</sup>	0 to 65 mg/m <sup>3</sup>

<sup>1</sup> Uncertainties may not be calculated based on the full measurement range.

<sup>2</sup> Manufacturer’s stated accuracy for nephelometer when calibrated for local particulate type.

## 4.2 Maintenance

### 4.2.1 Maintenance Notes

#### 4.2.1.1 McEwens Beach station

- There was no scheduled maintenance performed in January 2026.

#### 4.2.1.2 Mky Northern station

- There was no scheduled maintenance performed in January 2026.

#### 4.2.1.3 Mky Southern station

- There was no scheduled maintenance performed in January 2026.

### 4.2.2 Calibration & Maintenance Summary Tables

The last calibrations for the following parameters were performed on the indicated dates. Data supplied after this time is subject to verification, to be performed at the next calibration cycle.

Note: Maintenance and calibration dates may differ, as calibrations may be less frequent than scheduled maintenance visits.

Table 6 to Table 8 indicate when the particulate equipment was last maintained /calibrated.

“Calibration cycle” refers to the frequency of calibrations and intermediate calibration checks. The most frequent check or calibration is listed here.

**Table 6: McEwens Beach Maintenance Table**

Parameter	Date of Last Maintenance	Maintenance Type	Date of Last Calibration	Calibration Cycle
PM <sub>10</sub>	03/12/2025	Commissioning	03/12/2025	Yearly

**Table 7: Mky Northern Maintenance Table**

Parameter	Date of Last Maintenance	Maintenance Type	Date of Last Calibration	Calibration Cycle
PM <sub>10</sub>	03/12/2025	6-Monthly	03/12/2025	2-Monthly

**Table 8: Mky Southern Maintenance Table**

Parameter	Date of Last Maintenance	Maintenance Type	Date of Last Calibration	Calibration Cycle
PM <sub>10</sub>	03/12/2025	3-Monthly	03/12/2025	2-Monthly

## 5.0 Results

### 5.1 Data Capture

Data capture refers to the amount of available data collected during the report period. BAM 1020 data capture at McEwens station is based on 1-hour averages. E-Samplers at Mky Northern and Southern stations are calculated from 5-minute data.

The percentage of data captured is calculated using the following equation:

$$\text{Data capture} = (\text{Reported air quality data} / \text{Total data}) \times 100\%$$

Where:

- Reported air quality data = Number of instrument readings which have been verified through a quality assured process and excludes all data errors, zero data collection due to calibration, failures and planned and unplanned maintenance.
- Total data = Total number of samples (instrument readings) expected for the sampling period. Total data is calculated based on the same averaging period as “reported air quality data” and the duration of the corresponding report period. e.g., for 5-minute data collected over a month of 31 days, the total data would be equal to 12 (5-minute samples in an hour) x 24 (hours in a day) x 31 (days in a month) = 8928 samples.

Table 9 below displays data capture statistics for January 2026. **Bold** values in the table indicate data capture below 95%.

**Table 9: Monthly Data Capture for NQBP stations**

Station	Parameter	Data Capture (%)
McEwens Beach	PM <sub>10</sub>	100.0
Mky Northern	PM <sub>10</sub>	100.0
Mky Southern	PM <sub>10</sub>	100.0

## 5.2 Air Quality Summary

Table 10 below presents some statistical parameters for McEwens Beach, Mky Northern and Southern stations. The standard deviation of McEwens Beach is calculated based on the hourly averaged data. The standard deviation of Mky Northern and Southern is calculated based on the 5-minute averaged data.

**Table 10: General Statistics**

Station	Parameter	Time Period	Average ( $\mu\text{g}/\text{m}^3$ )	Standard Deviation ( $\mu\text{g}/\text{m}^3$ )
McEwens Beach	PM <sub>10</sub>	1 month	14	9
Mky Northern	PM <sub>10</sub>	1 month	17	12
Mky Southern	PM <sub>10</sub>	1 month	16	12

Table 11 below summarises any exceedance of the air quality goals of McEwens Beach detailed in Table 4.

**Table 11: Exceedance Recorded for McEwens Beach Station**

Parameter	Time Period	Value of Exceedance ( $\mu\text{g}/\text{m}^3$ )	Date of Exceedance
PM <sub>10</sub>	24 Hour	-	-

### 5.2.1 Air Quality Categories

Air quality categories rather than an air quality index have been adopted to align with a Nationally consistent method of reporting of air quality data.

Each air quality measurement from a monitoring station is assigned an air quality category rating based on comparison of the measurement value against the relevant air quality guideline. Five colour-coded air quality categories are used, being 'Good' (Blue), 'Fair' (Green), 'Poor' (Purple), 'Very Poor' (Red) or 'Extremely Poor' (Black). Values greater than the air quality guideline will be appear as 'Poor', 'Very Poor' or 'Extremely Poor'.

The Air Quality Categories rating is based on 1-hour averages values.<sup>3</sup>


**Table 12: Colour-coded Categories for Air Quality Categories<sup>4</sup>**

Not available	Good <50	Fair 50-100	Poor 100.1-200	Very poor 200.1-600	Extremely poor >600
---------------	-------------	----------------	-------------------	------------------------	------------------------

The PM<sub>10</sub> 1-hour average values for the reporting month at the Mky Northern and Southern stations were assessed against the air quality category rating, and the pie chart on the next pages presents the percentage of the time for which a specific air quality category was identified.


<sup>3</sup> <https://www.qld.gov.au/environment/management/monitoring/air/air-monitoring/air-quality-categories>

<sup>4</sup> Colour scheme and pie chart type has been changed to reflect the website of North Queensland Bulk Ports Corporation.

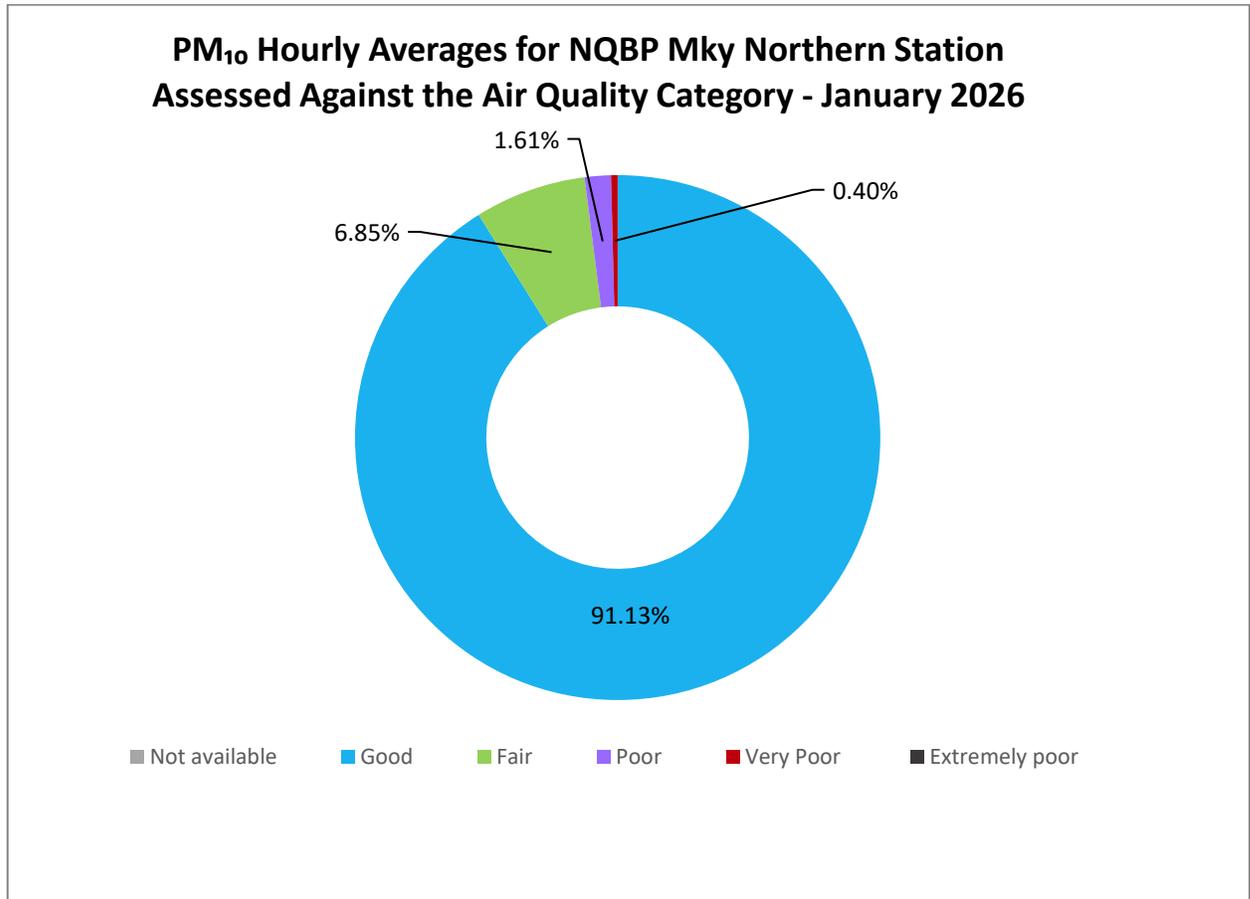

**Figure 3: Hourly PM<sub>10</sub> Averages for NQBP Mky Northern Station Assessed Against the Air Quality Categories**

91.13% of days during the reporting period presented by the Air Quality Category are classified as Good, 0.00% of days are classified as Not available, 6.85% of days are classified as Fair, 1.61% of days are classified as Poor, 0.40% of days are classified as Very Poor and 0.00% of days are classified as Extremely Poor.

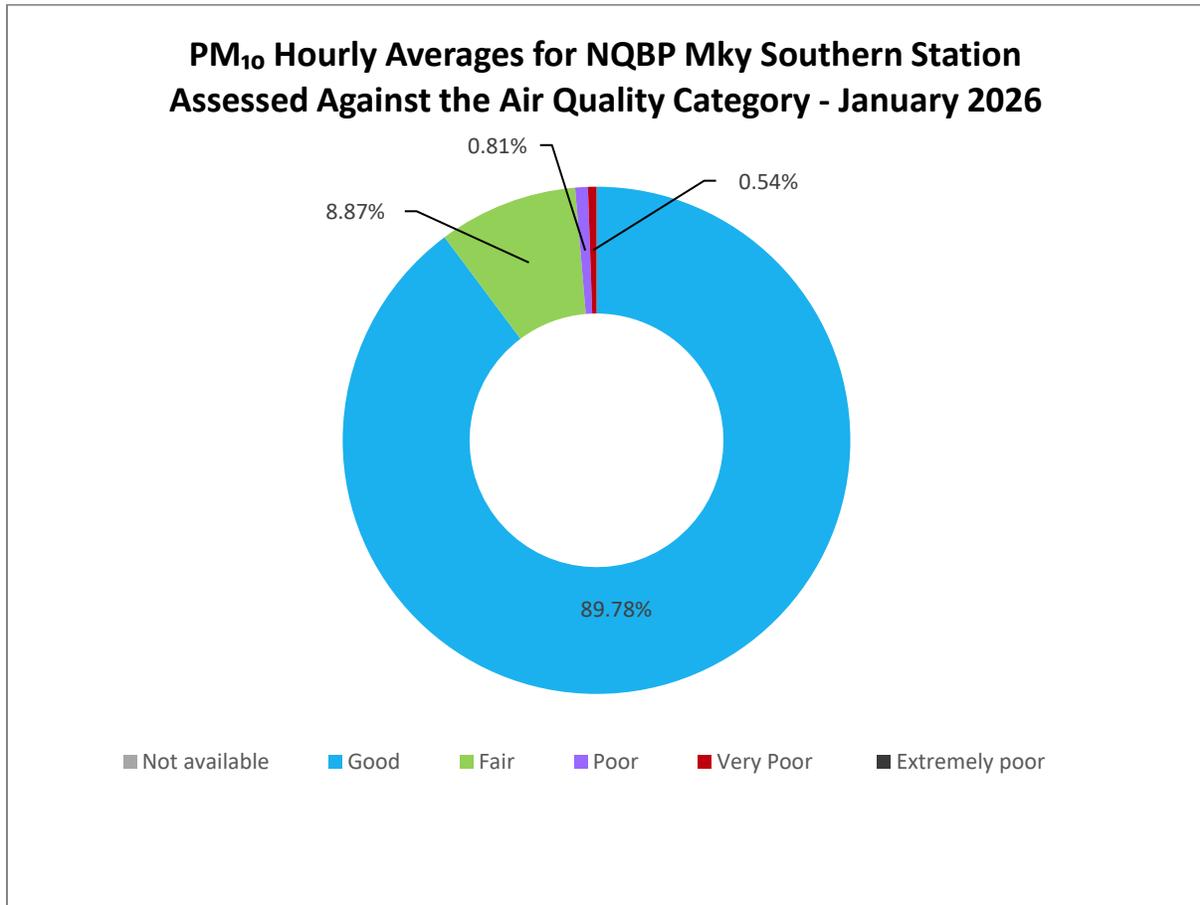

**Figure 4: Hourly PM<sub>10</sub> Averages for NQBP Mky Southern Station Assessed Against the Air Quality Categories**

89.78% of days during the reporting period presented by the Air Quality Category are classified as Good, 0.00% of days are classified as Not available, 8.87% of days are classified as Fair, 0.81% of days are classified as Poor, 0.54% of days are classified as Very Poor and 0.00% of days are classified as Extremely Poor.

### 5.3 Tabulated Data

Table 13 details the daily averages for PM<sub>10</sub> measured at Southern and Northern stations.

**Table 13: NQBP Stations Data Table**

Date	McEwens Beach PM <sub>10</sub> (µg/m <sup>3</sup> )	Mky Northern PM <sub>10</sub> (µg/m <sup>3</sup> )	Mky Southern PM <sub>10</sub> (µg/m <sup>3</sup> )
1/01/2026	12	10	9
2/01/2026	11	15	12
3/01/2026	12	13	11
4/01/2026	14	15	12
5/01/2026	9	8	10
6/01/2026	11	11	12
7/01/2026	16	19	18
8/01/2026	20	20	22
9/01/2026	21	18	21
10/01/2026	25	35	33
11/01/2026	34	61	55
12/01/2026	10	26	20
13/01/2026	7	14	14
14/01/2026	8	15	14
15/01/2026	6	13	14
16/01/2026	9	9	11
17/01/2026	7	6	8
18/01/2026	10	18	21
19/01/2026	17	18	20
20/01/2026	18	18	18
21/01/2026	17	19	17
22/01/2026	15	14	14
23/01/2026	10	11	13
24/01/2026	17	13	15
25/01/2026	19	17	16
26/01/2026	15	15	14
27/01/2026	9	9	9
28/01/2026	9	7	7
29/01/2026	16	15	16
30/01/2026	15	16	16
31/01/2026	13	17	17

## 5.4 Graphic Representations

Validated PM<sub>10</sub> data was used to construct the following monthly graphic representations.

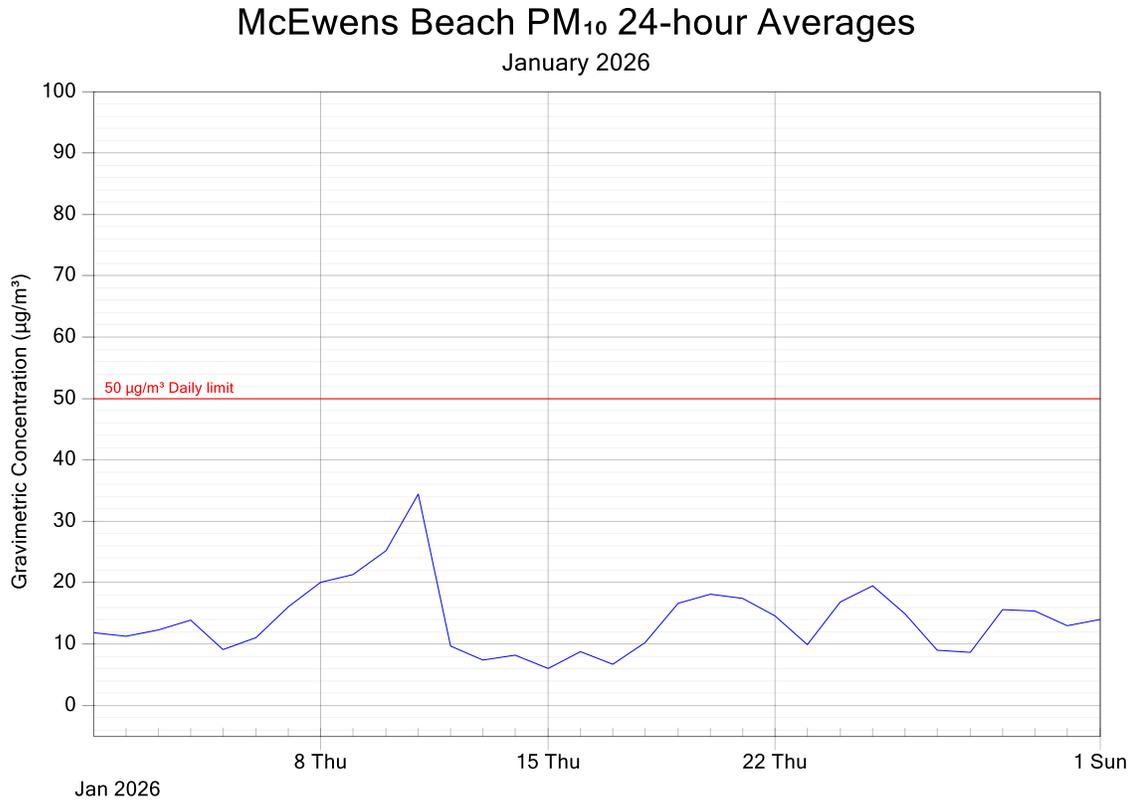


Figure 5: McEwens Beach Station PM<sub>10</sub> 24-hour Averages

### Mky Northern PM<sub>10</sub> 24-hour Averages January 2026

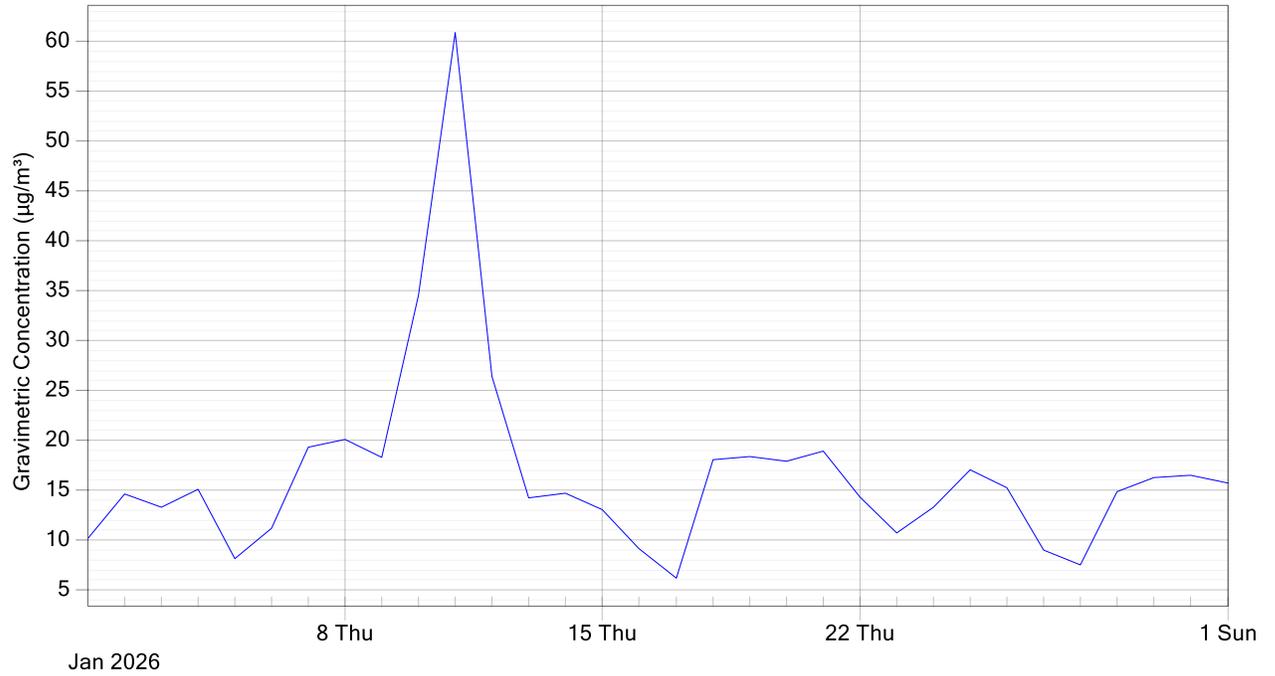


Figure 6: Mky Northern Station PM<sub>10</sub> 24-hour Averages

### Mky Southern PM<sub>10</sub> 24-hour Averages January 2026

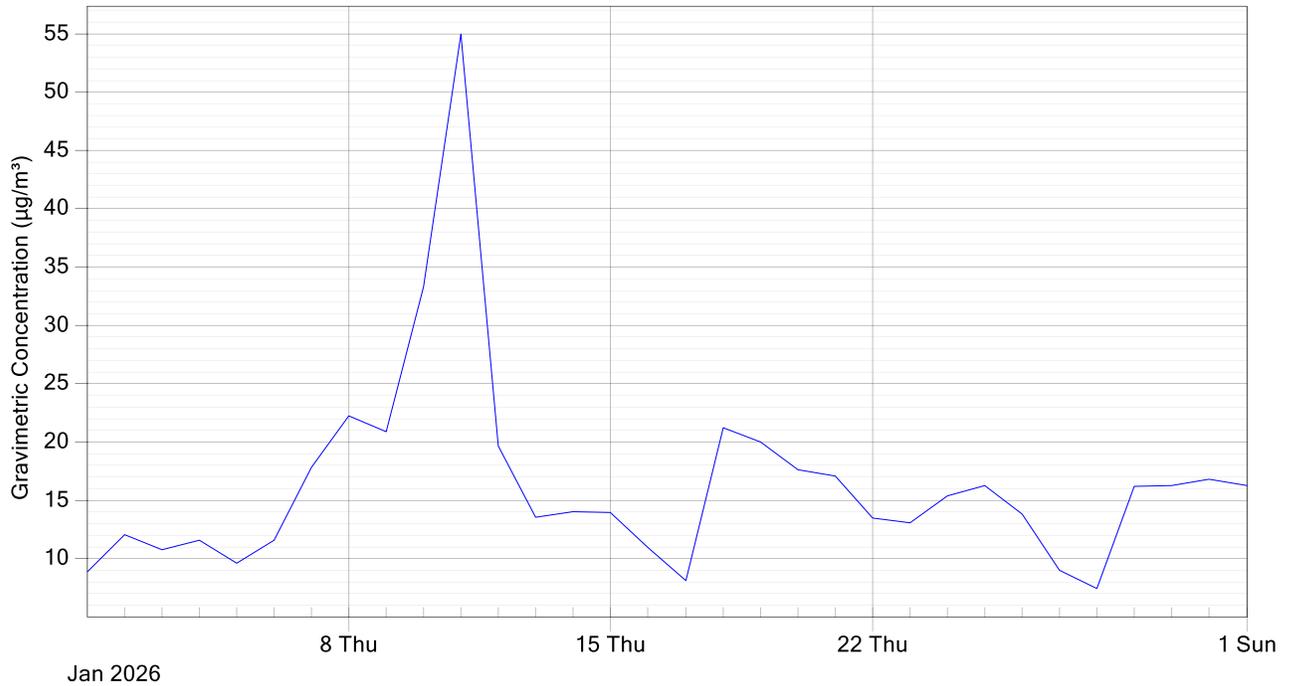


Figure 7: Mky Southern Station PM<sub>10</sub> 24-hour Averages

### Mky Northern and Southern Stations PM<sub>10</sub> 24-hour Averages

January 2026

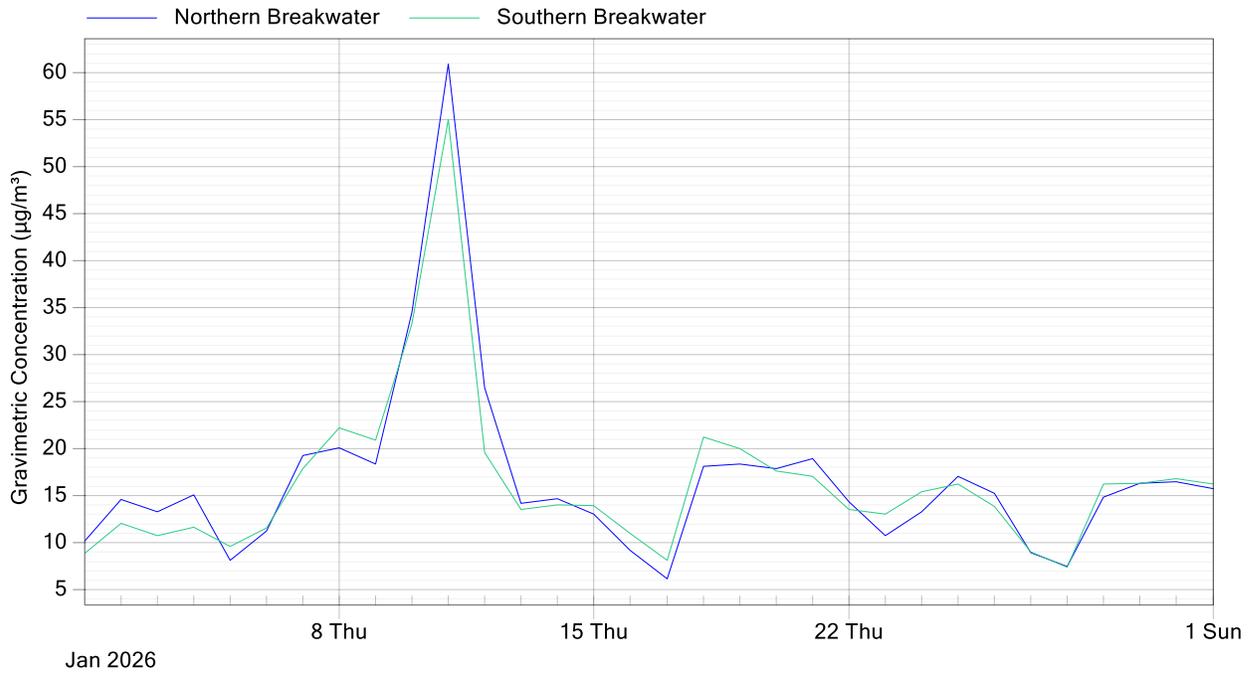


Figure 8: Mky Northern and Mky Southern Stations PM<sub>10</sub> 24-hour Averages Comparison

## 6.0 Valid Data Exception Tables

The tables below detail all changes made to the raw data set during the validation process. An explanation of reasons given in the table can be found in Appendix 2.

**Table 14: McEwens Beach BAM 1020 Valid Data Exception Table**

Start Date	End Date	Reason	Change Details	User Name	Change Date
01/01/2026 00:00	01/02/2026 00:00	No data affected during the reporting period	Nil	EW	27/02/2026

**Table 15: Mky Northern E-Sampler Valid Data Exception Table**

Start Date	End Date	Reason	Change Details	User Name	Change Date
01/01/2026 00:00	01/02/2026 00:00	No data affected during the reporting period	Nil	EW	27/02/2026

**Table 16: Mky Southern E-Sampler Valid Data Exception Table**

Start Date	End Date	Reason	Change Details	User Name	Change Date
01/01/2026 00:00	01/02/2026 00:00	No data affected during the reporting period	Nil	EW	27/02/2026

## 7.0 Report Summary

- The PM<sub>10</sub> data capture was above 95% for McEwens Beach, Mky Northern, and Southern stations in the reporting month.
- The PM<sub>10</sub> monthly average for McEwens Beach station was 14 µg/m<sup>3</sup> with a standard deviation of 9 µg/m<sup>3</sup>.
- The PM<sub>10</sub> monthly average for Mky Northern station was 17 µg/m<sup>3</sup> with a standard deviation of 12 µg/m<sup>3</sup>.
- The PM<sub>10</sub> monthly average for Mky Southern station was 16 µg/m<sup>3</sup> with a standard deviation of 12 µg/m<sup>3</sup>.

-----END OF REPORT-----

## **Appendix 1 - Definitions & Abbreviations**

$\mu\text{g}/\text{m}^3$	Micrograms per cubic metre at standard temperature and pressure (0°C and 101.3 kPa)
LDL	Lower Detectable Limit
PM <sub>10</sub>	Particulates less than 10 microns equivalent in aerodynamic diameter

## Appendix 2 - Explanation of Exception Table

**Commissioning** refers to the initial setup and calibration of the instrument when it is first installed. For some instruments there may be a stabilisation period before normal operation commences.

**Data affected by environmental conditions – wind speed/wind speed gust spike** refers to when a one-off high reading occurs due to a natural occurrence such as a bird sitting on the wind sensor, or some other event causing the readings to spike.

**Data transmission error** refers to a period of time when the instrument could not transmit data. This may be due to interference, or a problem with the phone line or modem.

**Equipment malfunction/instrument fault** refers to a period of time when the instrument was not in the normal operating mode and did not measure a representative value of the existing conditions.

**Gap in data/data not available** refers to a period of time when either data has been lost or could not be collected.

**Instrument Alarm** refers to an alarm produced by the instrument. A range of alarms can be produced depending on how operation of the instrument is being affected.

**Instrument out of service** refers to a lack of data due to an instrument being shut down for repair, maintenance, or factory calibration.

**Linear offset or multiplier** refers to when an offset or multiplier has been applied between two points where the values of the offset or multiplier are different and the correction is interpolated between the two points.

**Logger error** refers to when an error occurs and instrument readings are not correctly recorded by the logger.

**Maintenance** refers to a period of time when the logger/instrument was switched off due to maintenance.

**Power Interruption** refers to no power to the station therefore no data was collected at this time.

**Stabilisation following power interruption** refers to the start/up period of an instrument after power has been restored.

**Tape break** refers to the breaking of the EBAM/BAM sample tape during operation.